


# Enhanced Signal Processor - Chip Pin Designations

PICAXE Micro Controller pin designations for enhanced single 28X1 SPU  
(must be fitted with external 16MHz resonator)

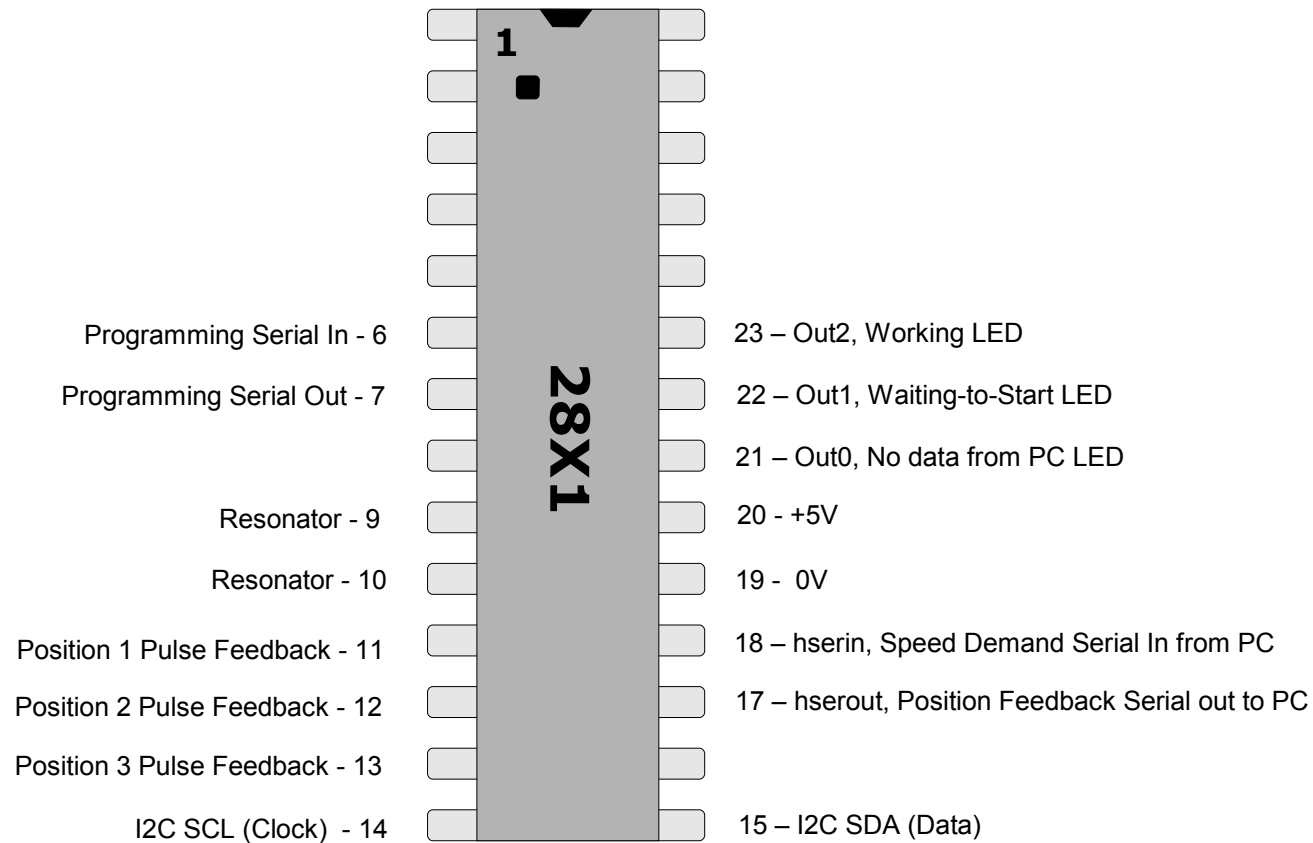

Notes -

See PICAXE documentation for designations of remaining pins.

See Basic programs for format details of Serial comms - requires RS232 voltage levels (ie use a RS232-TTL converter module or MAX232 chip).